

IQ 200C

115 V / 60 Hz

SELF-CONTAINED GRANULAR ICE MACHINE

3 YEARS
WARRANTY
PARTS & LABOR



FEATURES

- ▶ PRODUCES DRY GRANULAR ICE
- ▶ THE MOST EFFICIENT EVAPORATOR OF THE MARKET, LOWER ENERGY CONSUMPTION AND HIGHER ICE PRODUCTION
- ▶ EVAPORATOR WITHOUT GASKETS OR SEALS
- ▶ STAINLESS STEEL AUGER WITH RESILIENT COATING TO MAXIMIZE LIFESPAN
- ▶ POWERFUL SPEED REDUCER ON TOP
- ▶ ELECTROMECHANICAL CONTROL SYSTEM
- ▶ STIF: STRONG INOX FRAME. SOLID MACHINE STRUCTURE IN 4 COLUMNS WITH AISI 304 STAINLESS STEEL FRAME
- ▶ STRONGEST DOOR IN THE MARKET. MADE OF STAINLESS STEEL. OPENING AND DAMPING SYSTEM PATENTED BY ITV
- ▶ FRONT VENTILATION CONCEPT: FRONTAL IN-OUT AIR SYSTEM ALLOWS 'BUILT IN' MACHINES
- ▶ CLEANING SWITCH: ALLOWS CIRCULATION OF WATER WITH DESCALING PRODUCT (CALKLIN OR SIMILAR) WITHOUT COOLING
- ▶ EASI: EASY ACCESS FOR SERVICE & INSTALLATION. ALL PANELS CAN BE DISASSEMBLED SEPARATELY
- ▶ ON/OFF LIGHTED ROCKER SWITCH IN FRONT PANEL
- ▶ TROPICALIZED MACHINES (T CLASS) / HEIGHT ADJUSTABLE LEGS FROM 105MM TO 155MM

I THE INSTALLATION OF AN ANTI-SCALE FILTER AND PERIODIC CLEANING ARE ADVISED IN AREAS WITH MEDIUM OR HIGH LIMESCALE CONTENT (HARD WATER)



	 24 H	 70°F/21°C	 50°F/10°C	 90°F/32°C	 70°F/21°C	 STOCK	 in (mm)	 in (mm)	
		lbs (Kg)	lbs (Kg)	lbs (Kg)	lbs (Kg)	lbs (Kg)			
IQ 200C A		220 (100)	140 (64)	44 (20)	44 (20)	44 (20)	Width 18.31"(465) Depth 23.43"(595) Height 31.11"(790)*	Width 20.67"(525) Depth 25.40"(645) Height 36.23"(920)	DRY GRANULAR ICE 20% RESIDUAL WATER CONTENT
IQ 200C W		225 (102)	145 (66)						

* WITH LEGS 35.24"/37.21"

ACCESSORIES

INCLUDED



KNURLED SCREWS



WALL BRACKETS



DRAIN STRAINER



SCOOP



4 HEIGHT ADJUSTABLE LEG KIT

NOT INCLUDED (OPTIONAL)



10" FILTER
ANTI-LIMESCALE + ANTI-CHLORINE
CS-101 K




10" REPLACEMENT CARTRIDGE
ANTI-LIMESCALE + ANTI-CHLORINE
CS10



SCALE KLEEN

TECHNICAL SCHEME

IQ 200C

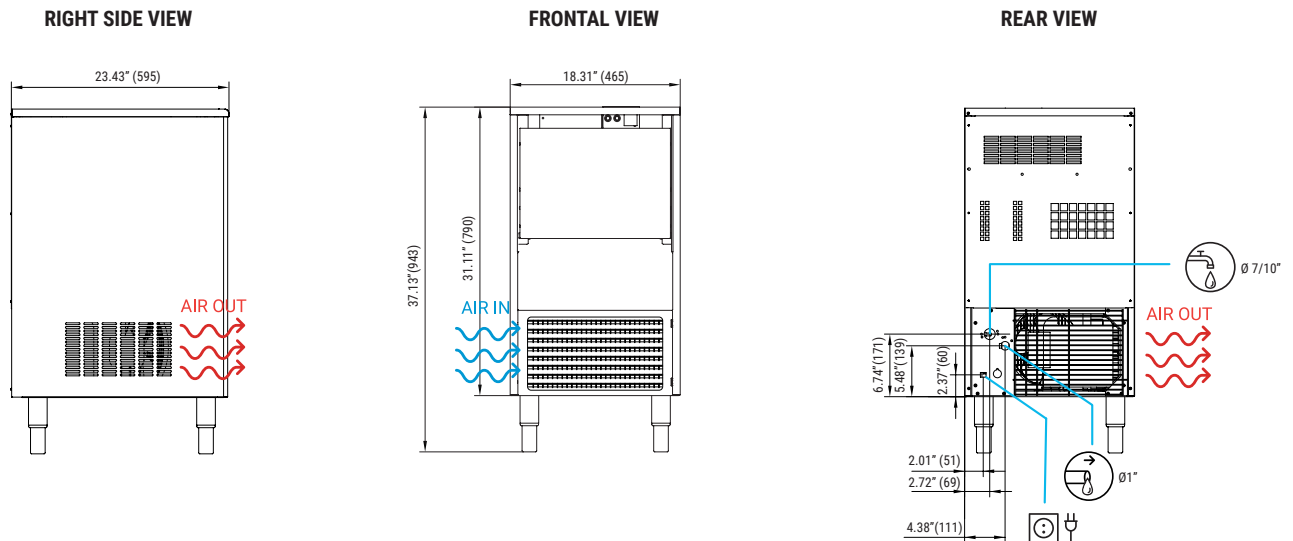

* All dimensions in inches (and mm)

OPERATING CONDITIONS

PRODUCTION (LBS) 60Hz

	V	Hz	ph	IQ 200C AIR COOLED					IQ 200C WATER COOLED				
				50° 10°	60° 15°	70° 21°	86° 30°		50° 10°	60° 15°	70° 21°	86° 30°	
±10% V	115	60	1N	235	218	191	164		240	223	198	170	
41°F/109°F				220	202	168	141		225	207	174	146	
41°F/95°F				200	175	140	120		205	179	145	124	
14.5 psi (1 bar) / 87 psi (6 bar)				177	150	118	97		181	153	122	100	

MODELS															
	(°F)	(BTU/h)	(W)	(W) 109°F	(AWG/mm²)	(n.)	FUSE	100lbs 90°F / 70°F (Kwh/100 lbs)	gal 100lbs (l/h)	HEAT REJECTED (BTU/h)	(W)	(lbs)	(lbs)		
IQ 200C A		14°	3,115	913	533	14/1.5	3	10	12	12	4.2	2,429	712	128	139
IQ 200C W		14°	3,115	913	533	14/1.5	3	10	12	47.6	17	2,429	712	128	139

ITV ice makers
9550 Satellite Blvd, Suite 100
Orlando, FL 32837
Phone: 1 407 826 1860 | Fax: 1 407 826 1861
Toll Free: 1 888 488 1423
sales@itvice.com | www.itvice.com

TECHNICAL ASSISTANCE
ITV ice makers SERVICE
SERVICE
service@itvice.com
Skype: service@itvice.com
PHONE: +1 888 488 1423
FROM 8AM TO 5PM EST

3 YEARS
WARRANTY
PARTS & LABOR
2 ADDITIONAL YEARS
ON COMPRESSOR &
EVAPORATOR
Read our warranty policy
to know more about
limitations and exclusions

NSF
ETL US
Intertek

AXIAL SYSTEM